
sales@xealenergy.com
800.484.4515



DRIVER APP



BUILDING OWNER PORTAL

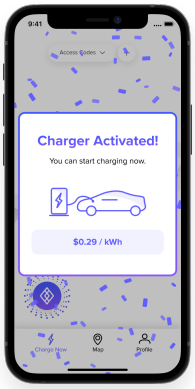

WALL MOUNT



PEDESTAL

Key Features

Design	Sleek design and configurable for indoor and outdoor use
Charging Speed	Universal level 2 charger is compatible with all electric vehicles and charges up to 3X faster
Dashboard	Accurate energy metering, dynamic access control, over-the-air updates, and automated revenue share model
Dynamic Power Optimization	Optimizes the power delivered to chargers, even if the panels or breakers are oversubscribed, without relying on a cloud-based management system.
Future-Proof Connectivity	Apollo Protocol allows remote control with no IT capex and no internet dependence to a central server needed to operate
Easy Install	Building-integrated power management with no electrical upgrades
Driver Mobile App	Seamless 'Tap-to-Charge' experience with 50X faster connection and 100% uptime
Reporting	Data reporting, monitoring, customized control, and user management via building portal

Technical Specifications

Charging Power	32 Amp (7.7 kW max)
Product Dimensions	19.7"L x 8.9"W x 5.3"D
Product Weight	13.5 lbs
Supply Circuit	208/240V, 40A
Warranty	5 years
Charge Cable Length	25 feet
Enclosure	Fully Sealed NEMA 4
Connectivity	Apollo Protocol

Installation	Hardwired (3 foot service whip protected)
Vehicle Connector Type	Over-molded SAE J1772 Connector
Accessories Included	SAE J1772 Connector Holster (wall mount)
Environment Rating	Indoor/Outdoor rated
Operating Temperature	-22°F to 122°F (-30°C to +50°C)
Certifications	UL, ETL, cETL, ENERGY STAR®, OpenADR , LEED
Country of Origin	United States of America